

## ECONO Standard Drum and Pail Heater

### Product Highlights

- ✓ Good 3.6" (91mm) coverage area
- ✓ Economical choice
- ✓ Good durability and flexibility
- ✓ Grounded serpentine wound heating element meets NEC 427.23
- ✓ Easy adjustable thermostat control
- ✓ Designed for metal drums and pails
- ✓ **CE** (see page A-2 for more information)

**Moisture  
and Chemical  
Resistant**

Temperatures up to



425°F (218°C)




**BriskHeat**

**ECONO Standard Drum and Pail Heater**

### Specifications:

- Heating element is laminated between **two layers of 15 mil fiberglass** reinforced silicone rubber
- Silicone rubber density of 16.8 oz/yd<sup>2</sup> (570 grams/m<sup>2</sup>) per layer
- Patented grounding heating element
- Dielectric strength of over 2000 volts
- Adjustable thermostat, 50- 425°F (10– 218°C)
- 450°F (232°C) maximum exposure temperature on heating surface
- Power cord 6 feet (1.8m) long
- The spring closure can be expanded 3" (76mm)

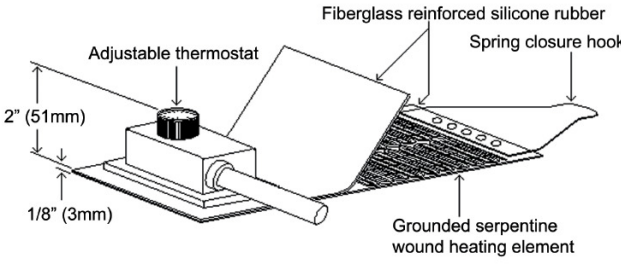

### Ordering Information:

Gallon (Liter) Size	Diameter in (mm)	Total Wattage	Length in (mm)	Width in (mm)	Part Number	
					120VAC	240VAC
5 (19)	11.1 (282)	300	35.0 (889)	3.6 (92)	ECONO05-1	ECONO05-2
15 (57)	14.0 (355)	500	44.0 (1118)	3.6 (92)	ECONO15-1	ECONO15-2
30 (114)	18.6 (473)	750	58.5 (1496)	3.6 (92)	ECONO30-1	ECONO30-2
55 (208)	22.3 (565)	1100	70.0 (1778)	3.6 (92)	ECONO55-1	ECONO55-2

120VAC includes NEMA 5-15 plug / 240VAC bare wires