

FE General Purpose Constant Wattage Heat Cable

Product Highlights

- Temperatures to 400°F (204°C)
- Power remains constant regardless of temperature
- Can be cut-to-length at job site
- Ideal for a wide range of general purpose applications:
 - Mid range process temp control
 - Water Lines
 - Fire Protection Systems
 - Fuel Oil
 - Condensate Return
 - Hot Water Lines
 - Lines purged with 250 psig steam

Specifications

- Maximum exposure temperature is 400°F (204°C)
- Moisture, chemical, flame and radiation resistant
- 12AWG bus wires
- Dimensions .2" x .3"
- 40lb. per 500-foot spool

Approvals:



Ordinary Locations
 Hazardous Locations:
 Class I, Division 2, Groups B, C, & D
 Class II, Division 2, Groups F, & G
 Class III, Division 2




Ordinary locations
 (120, 240VAC only)

Approvals valid only when used with appropriate heating cable and installation accessories, and installed in accordance with all applicable instructions, codes, and regulations.

FE Connection / Termination Kits

Part Number	Description
FECABUC	Universal Connection / Termination Kit
FECABKC	Lead / End Seal Kit
FECABSK	Splice Kit
FECABLP	Lead Pouch
FECABEP	End Pouch

Important: A Temperature Controller is Required for this product! See our controller page for options.

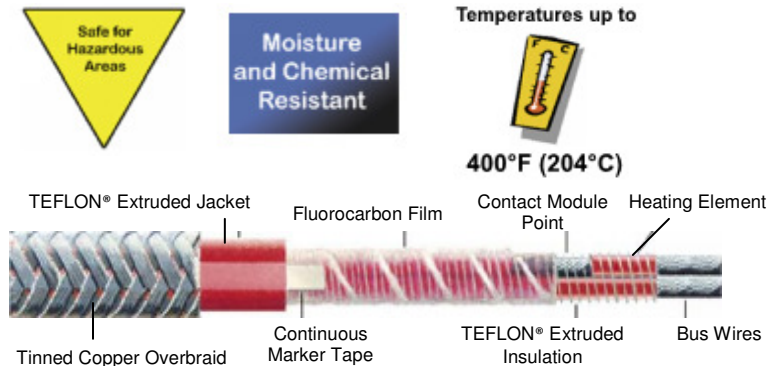

Maximum Circuit Length in ft (m)

Cable	120VAC	208VAC	240VAC	277VAC	480VAC
3 watts/ ft (10 watts/ m)	360 (110)	625 (191)	720 (220)	N/A	1440 (439)
5 watts/ ft (16 watts/ m)	275 (84)	477 (145)	550 (168)	N/A	1100 (335)
8 watts/ ft (26 watts/ m)	220 (67)	381 (116)	440 (134)	508 (155)	880 (268)
12 watts/ ft (39 watts/ m)	180 (55)	312 (95)	360 (110)	416 (127)	720 (220)

Circuit Module Length in ft (m)

Cable Type	120VAC	208VAC	240VAC	277VAC	480VAC
3 watts/ ft (10 watts/ m)	2.0 (0.6)	4.0 (1.2)	4.0 (1.2)	N/A	8.0 (2.4)
5 watts/ ft (16 watts/ m)	2.0 (0.6)	4.0 (1.2)	3.0 (0.9)	N/A	6.0 (1.8)
8 watts/ ft (26 watts/ m)	2.0 (0.6)	4.0 (1.2)	4.0 (1.2)	4.0 (1.2)	6.0 (1.8)
12 watts/ ft (39 watts/ m)	2.0 (0.6)	6.0 (1.8)	2.0 (0.6)	4.0 (1.2)	4.0 (1.2)

Accessories

Part Number	Description
AAT260 AAT2180	Aluminum Adhesive Tape: 2" x 180' (51mm x 55m). Temp Limit: 350°F (176°C) 2" x 180' (51mm x 55m). Temp Limit: 550°F (288°C)
BCLCAB	Electrical heat trace warning label. Required by code for every 10ft (3m) of pipe.
BPSCAB2-6	Stainless steel pipe straps used to secure pipe standoff to pipe. Adjustable from 2" to 6" (51 x 152mm)
HCP1 HCP3	Heat Conductive Putty. Used to fill voids between cable and pipe surface: 1 lb. (0.5kg) 3 lb. (1.4kg)
PSAT36A	Pressure Sensitive Fiberglass Adhesive Tape. Size: 0.5" x 108' (13mm x 38m). Temp Limit: 350°F (176°C)
RTV3.0	Silicone sealant used to seal lead pouches, end pouches, and pipe standoffs. 3 oz. (89ml)
JBACAB001 JBACAB002	Metallic Junction Box with cover and gasket: Single hub Double hub