

O.E.M. HEATERS

SpeedTrace Extreme Pre-Assembled Self-Regulating Heating Cable

Product Highlights

- ✓ Built for heating in extreme cold conditions down to: -40°F (-40°C)
- ✓ Durable industrial grade
- ✓ 60% more wattage than typical 5w/ft rated self-regulating heating cable
- ✓ Ideal for freeze protection and thawing: metal or plastic pipes and valves. Can also be used on small tanks and vessels.
- ✓ Indoor or outdoor use
- ✓ Grounded for safety
- ✓ Easy-to-install: pre-assembled with power cord and plug
- ✓ Safe to overlap, spiral wrap, or loosely install
- ✓ Automatically adjusts heat output based on surface and ambient temperature
- ✓ No temperature controller is required

Suitable for Extreme Cold

For Temperatures Down to:

-40°F (-40°C)

NEW

**SpeedTrace
Extreme**




Specifications:

- Supply voltage: 110-120VAC
- 8 watts/ft (26 watts/m) at 50°F (10°C)
- 12.8 watts/ft (42 watts/m) at 32°F (0°C)
- Maximum exposure temperature: 150°F (65°C)
- Moisture and flame resistant thermoplastic elastomer outer jacket
- 16 AWG bus wires
- Pre-terminated 30" (76cm) long power cord with standard 3-prong (NEMA-5-15) plug

Secure the unit with adhesive tape, wrap with insulation, and plug it in.

Safe to overlap & insulate.

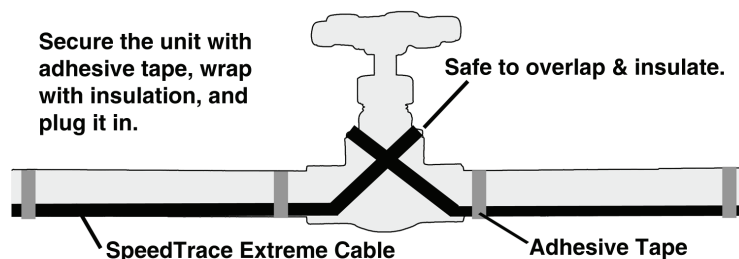

Ordering Information:

Part Number	FFSL81-6	FFSL81-12	FFSL81-18	FFSL81-24	FFSL81-50	FFSL81-75	FFSL81-100
Cable Length (feet)	6	12	18	24	50	75	100


Adhesive Tape

Allows for easy installation and increased efficiency by providing intimate contact with surface to be heated.

Part Number	Material	Width in (mm)	Length Yards (m)	Temperature Limit
PSAT36A	Fiberglass	0.5 (13)	36 (32.9)	350°F (176°C)

For more efficient heating and faster thawing we recommend:

INSUL-LOCK® DS Flexible Closed Cell Pipe Insulation



- Easy-to-install
- Cost effective, flexible thermal insulation for pipes
- Suitable for indoor or outdoor use