

SpeedTrace Pre-Assembled Self-Regulating Heating Cable

Product Highlights


- ✓ Ideal for freeze protection and thawing: metal or plastic pipes and valves
- ✓ Suitable for temperatures down to: -40°F (-40°C)
- ✓ Indoor or outdoor use
- ✓ Easy-to-install: pre-assembled with power cord and plug
- ✓ Safe to overlap and insulate
- ✓ Automatically adjusts heat output based on surface and ambient temperature
- ✓ No temperature controller is required

NEW



Specifications:

- Supply voltage: 110-120VAC
- 5 watts/ft (16 watts/m) at 50°F (10°C)
- 8 watts/ft (26 watts/m) at 32°F (0°C)
- Maximum exposure temperature: 150°F (65°C)
- Moisture and flame resistant thermoplastic elastomer outer jacket
- 16 AWG bus wires
- Pre-terminated 30" (76cm) long power cord with standard 3-prong (NEMA-5-15) plug

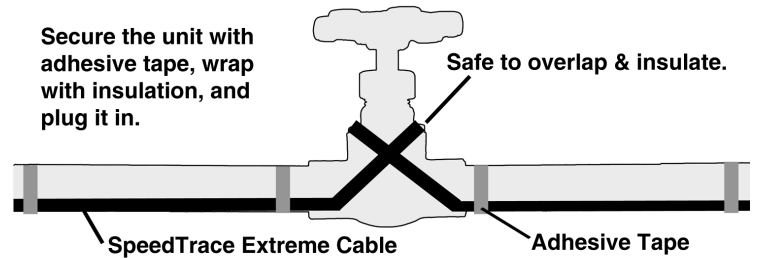

Ordering Information:


Part Number	FFSL1-6	FFSL1-12	FFSL1-18	FFSL1-24	FFSL1-50	FFSL1-75	FFSL1-100
Cable Length (feet)	6	12	18	24	50	75	100

Adhesive Tape

Allows for easy installation and increased efficiency by providing intimate contact with surface to be heated.

Part Number	Material	Width	Length	Temperature Limit
		in (mm)	Yards (m)	
PSAT36A	Fiberglass	0.5 (13)	36 (32.9)	350°F (176°C)

For more efficient heating and faster thawing we recommend: **INSUL-LOCK® DS Flexible Closed Cell Pipe Insulation**

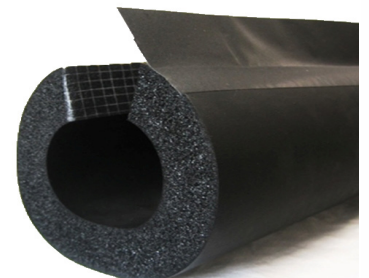

- Easy-to-install
- Cost effective, flexible thermal insulation for pipes
- Suitable for indoor or outdoor use